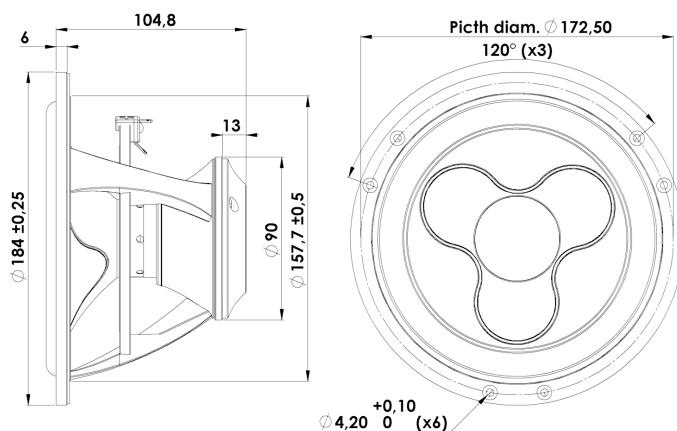


18 cm Woofer

Key Features:

- Under-Hung Neodymium Motor Design
- Patented Symmetrical Drive (SD-3)
- Black Anodized Alu. Cone
- Exceptionally Long Linear Excursion
- Low-Loss linear suspension
- Patented Design

Recommendations (please see Tech Note):

- Operating frequency range: fs=4000 Hz
- Cabinet volume - closed box: Vbox=17 ltr, f(-3dB)=64 Hz
- Cabinet volume - vented box: Vbox=35 ltr, fb=36 Hz, f(-3dB)=37 Hz

18WU/8747T00
T-S Parameters:

Resonance frequency [fs]	36 Hz
Mechanical Q factor [Qms]	3.72
Electrical Q factor [Qes]	0.43
Total Q factor [Qt]	0.38
Force factor [Bl]	7.4 Tm
Mechanical resistance [Rms]	1.1 kg/s
Moving mass [Mms]	18 g
Compliance [Cms]	1.1 mm/N
Effective diaph. diameter [D]	140 mm
Effective piston area [Sd]	154 cm ²
Equivalent volume [Vas]	36.2 l
Sensitivity (2,83V/1m)	85.5 dB

Mechanical Data:

Voice coil diameter	42 mm
Voice coil height	8 mm
Voice coil layers	4
Gap height	20 mm
Linear excursion	± 9 mm
Max mech. excursion	± 16 mm
Unit weight	1.7 kg
Cabinet Displacement Volume	0.45 l

Electrical Data:

Nominal impedance [Zn]	8 Ω
Minimum impedance [Zmin]	7.3 Ω
Maximum impedance [Zo]	51.7 Ω
DC resistance [Re]	5.8 Ω
Voice coil inductance [Le]	0.6 mH

Power Handling:

100h RMS noise test (IEC 18.4)	70 W
Long-term max power (IEC 18.2)	150 W
X-over: None	

